

# BBL2027


## ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

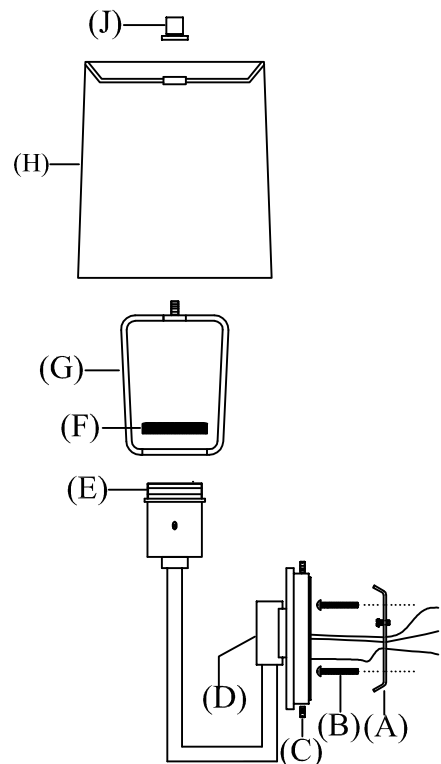

1. Attach fixture grounding (green) and house grounding wire with to back plate the green screw. Connect fixture to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
2. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
3. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
4. Remove back plate (A) from fixture base (D) by removing base screws (C).
5. Affix back plate (A) to wall outlet box with mounting screws (B) provided.
6. Attach fixture base (D) to back plate (A) and tighten with base screws (C).
7. Remove threaded ring (F) from socket cover (E).
8. Attach bottom ring of harp (G) over top threaded section of (E) and secure with threaded ring (F).
9. Remove finial (J) from harp (G).
10. Attach lamp shade (H) over the bolt attached on top of harp (G), screw finial (J) onto the bolt to secure shade (H) to harp (G).
11. Insert light bulb into socket (E).
12. Assembly is complete, test the fixture