

# Assembly Instruction Sheet #IS-1233W30-36 or Style 1233W30-36

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, drill X mm , drill Y mm drill bit.

**Light Source:** (2) 120V LED \*35W DIMMABLE (3000K+6000K)

**Estimated Assembly Time:** 10-20 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture.

We strongly recommend that a licensed, professional electrician perform the installation.

## Package Contents



front view



rear view

1) Measure the Distance between the holes on the back of the mirror, then proceed to mark the wall to match. Ensure that the markings are aligned with the studs in the wall.

1-1) Using a 10mm drill bit, drill into the stud where the markings are.

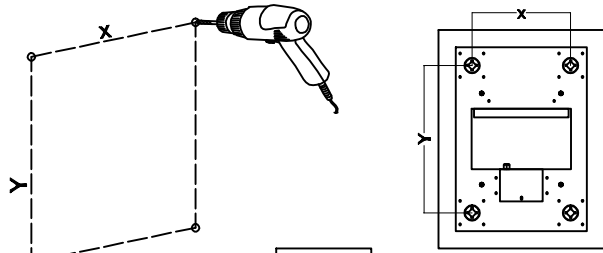


Figure 1



rear view

## Hardware Contents

| PART | DESCRIPTION | QUANTITY |
|------|-------------|----------|
| AA   | Anchoring   | 4pcs     |
| BB   | Screw       | 4pcs     |

AA

BB



2) Push anchors provided into the newly drilled holes

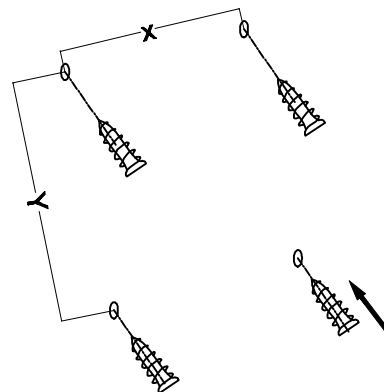


Figure 2