


ASCENSION™



FP6717** Ceiling Fan

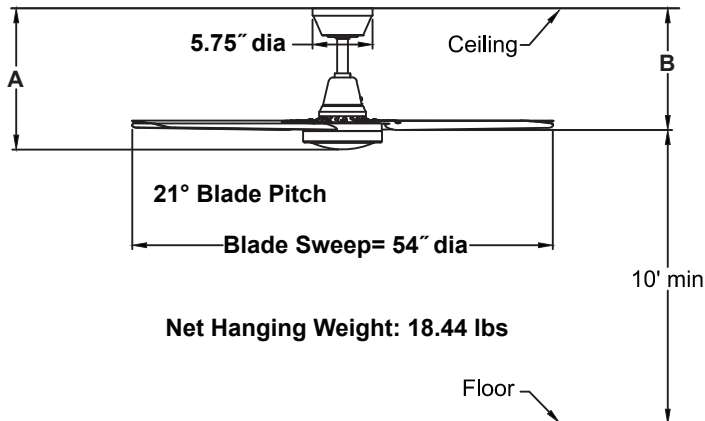

	A	B
Fan w/6" downrod	13.49"	11.60"
Fan w/12" downrod	19.49"	17.60"
Fan w/18" downrod	25.49"	23.60"
Fan w/24" downrod	31.49"	29.60"
Fan w/36" downrod	43.49"	41.60"
Fan w/48" downrod	55.49"	53.60"
Fan w/60" downrod	67.49"	65.60"
Fan w/72" downrod	79.49"	77.60"

Available Finish

BN	Brushed Nickel with Brushed Nickel Blade
MW	Matte White with Matte White Blade

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 15 motor is designed for optimal performance with this fan.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	233	6659	127	0.44	53
Med	161	4595	181	0.31	25
Low	91	2544	280	0.19	9

BLADES:

A set of four 24" steel blades is included.

CONTROL OPTIONS:

3-speed wall control is included. Slide button wall control has 3 fan speeds and off button.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.